

Vulcan Cladding



Overview

Vulcan Cladding is created from thermally modified New Zealand plantation timber and engineered with a patented vertical grain construction for superior weathering characteristics. A fine sawn face allows a depth of grain, and optimal coating performance.

The thermal modification process and vertical grain structure means Vulcan Cladding has enhanced stability, reduced resin content, is a beautiful homogeneous brown colour, and is naturally durable so does not require any chemical preservatives.

When specified and installed in accordance with the manufacturers instructions Vulcan Cladding systems will achieve CodeMark status for guaranteed acceptance with New Zealand building consent authorities.

Available in a range of architectural profiles and supplied factory pre-finished in Abodo Protector Oil – Abodo’s high performance penetrating exterior oil.

Wood species: Thermally Modified Radiata Pine (Pinus Radiata).

Standard profiles:



WB10 145x20
(125mm cover) Vertical/Horizontal




WB10 180x20
(160mm cover) Vertical/Horizontal



WB12 138x20
(118mm cover) Vertical




WB12 180x20
(160mm cover) Vertical



WB12 90x40
(70mm cover) Vertical



Fineline WB12F 180x20
(160mm cover) Vertical



WB12 90x60
(70mm cover) Vertical



Bevelback AW62 180x20
(148mm cover) Horizontal

Other custom profiles are available but may be subject to min order quantities - please refer to the Abodo Cladding Architectural Profile Chart.


Lengths: 2.4 - 6.0m*

*Product is supplied as standard in 'random length' or otherwise lengths at Abodo's option. Specified fixed lengths may be available but are subject to conditions including minimum quantity, price premium and availability. Please check with Abodo prior to placement of order.

Vulcan Cladding

Colours:

Colours presented are in Protector – Water Borne and are indicative only. Colour may change/fade as a part of the natural weathering process.

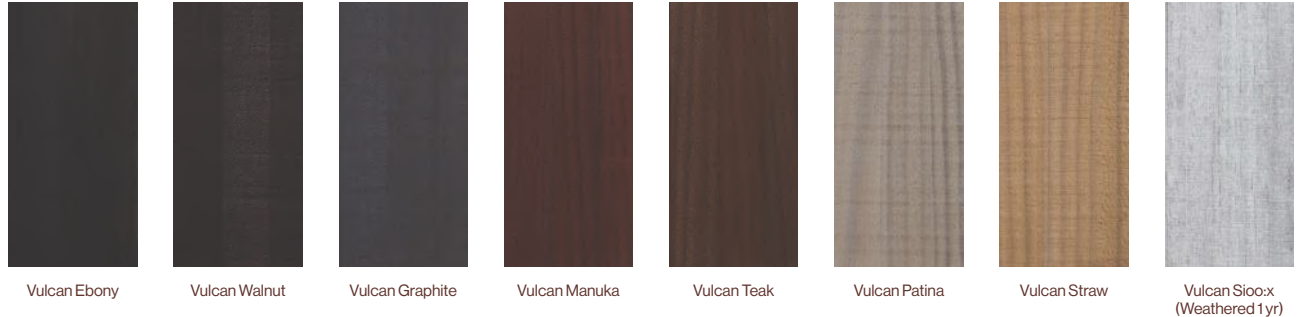

*Colours are indicative only.

Product specifications

Name:	Abodo Vulcan Cladding.
Quality:	Select Grade /Front face and edges virtually free of any defects but with one edge knot and one small face defect allowed per piece in 20% of boards only. Back side with some defects allowed.
Finish:	Fine bandsawn face.
Durability:	Thermally modified – INTENZ Thermowood 230 degrees schedule. No chemical preservatives used. Field tested at SCION, Rotorua. Approved for uses described in NZS3602:2003 Table 2A 'Requirements for wood-based building to achieve a 15 year durability performance Members exposed to exterior weather conditions and dampness'. Durability Class 1 (EN350-1), Class 2 above ground (AS5604). Available optionally treated for termite-prone areas.
Insect attack:	Thermally modified pine is resistant to most wood boring insects but is not always resistant to termites. Preservative treatment is required for termite zones.
Intended use:	Intended for above ground use in residential and light commercial buildings with risk score of 20 or below as per 'Weather rightness risk matrix' in E2/AS1.
Serviceable life:	30 years or more when maintained according to manufacturer's recommendations.
Warranty:	15 years against fungal decay (subject to terms and conditions).
Moisture content:	Approx. 7% MC (+/-2%) at time of dispatch.
Construction:	Laminated with vertical grain orientation.
Glue:	New generation polyurethane adhesive- VOC, solvent and formaldehyde free. Exterior Type 1 - AS/ NZS4364. Approved for Service Class 3 (exposed exterior applications).
Expected dimensional change in structure:	Width expansion approx 2%, length expansion approx 0.25%, thickness expansion approx 2.5% (from 7%MC to fibre saturation -variation will occur between boards). Vulcan is approximately 50% more stable than flat sawn radiata pine.
Density:	420-450 kg/m ³ .
Fire:	Group 3, Group 1S with application of FireShield coating (interior only).
Hardness:	Low (2.5kN Janka).
Weight:	-11 kg/m ² ('light weight cladding' NZS3604).
Thermal properties:	-0.099 W/(mK) (Thermal conductivity is reduced by 20-25% compared with radiata pine).
pH (indicative):	3.9.
Compatibility:	Vulcan has little or no corrosiveness on most metals (equivalent to untreated softwood) and can be placed in contact with most building materials Normal PVA, PU, MUF glues and RF resins can be used.

Vulcan Cladding

Product specifications

Coating:	Vulcan will take most stains, penetrating oils and paints well, though up-take of coating is generally higher than normal. At least one coat must be applied all sides including back face, and ends, and at least two coats to the front face and edges with Abodo Protector Oil or other approved proprietary wood stain. Available factory pre-coated with 1 or 2 coats.
Patent:	NZ Pat. 601245.
Certification:	FSC®-certified mixed, No.: SGS-COC-004944 . Declare Certified - Red List Free.
NZBC compliance:	CodeMark Certified cladding system- certificate number CMA-CM40070.
Green Building Points	Greenstar - 2.5pts /Homestar - 2pts + 1 innovation pt.

Product handling

- Weatherboards and accessories must be kept clean dry, under cover and out of the weather prior to installation.
- Timber must be stored horizontally on bearers at least 100mm off the ground.
- Extra care must be taken during installation so as not to damage the factory finish of the boards.
- Wear dust mask, eye protection when cutting timber.
- Do not burn treated timber. Dispose of off-cuts in lined land fill or an approved furnace.

Fixing overview

- Timber framing is to be in accordance with NZS3604. Studs at max 600mm centres. If installing horizontal weatherboards nogs must be spaced at max 800mm centres. If installing vertical weatherboards nogs must be spaced at max 480mm centres, or max 800mm centres if using structurally fixed CBH-45x45mm cavity battens.
- Fix cladding over a water proof, breathable building wrap, rigid air barrier or other suitable waterproof substrate in conformance with NZBC E2/AS1.
- A cavity system is recommended with minimum 45x18mm H3.1 battens (a cavity is required for CodeMark certification).
- Horizontal cavity battens should be castellated (notched) and beveled or Cavibat fluted polypropylene to allow water run-off in service.
- Structurally fixed H3.2 timber cavity battens are allowed, provided battens are fixed with stainless steel flat head nails or 10g screws staggered at min 300mm centres (when using a 20x45mm cavity batten) or min 600mm centres (when using a 45x45mm cavity batten) and with min 40mm fixing penetration into stud.
- Fix boards either vertically or horizontally as appropriate to the profile type specified at the following maximum batten spacings:
 - 480mm centres for vertically fixed weatherboards or
 - 600mm centres for horizontally fixed weatherboards
- High quality hot dipped galvanised fixings (secret fixed profiles only) or stainless steel/ silicon bronze fixings (face fixed profiles) must be used. Stainless steel fixings must be used in sea spray zones.
- For Bevelback, Vertical shiplap and Rusticated weatherboards, use rose or pentagon head annular groove nails (hand driven) to achieve minimum 30mm penetration into stud or stud and batten combined (when using a structurally fixed cavity batten) and positioned approximately 10mm beyond the over- lap.
- For WB10 or WB12 secret fix profile, use flat head ring shank nails or self drilling self-countersinking head screws so as to achieve 30mm penetration into stud, or 30mm into the stud and batten combined (when using a structural cavity batten only) and positioned 12mm from the tongue edge. Punching/puttying of fixings is not required. Screw fixing is recommended.

Vulcan Cladding

Fixing overview

- Fixings at ends of boards must be at least 12mm from edge, and must be pre-drilled before applying fastener.
- Cut ends and notches must be sealed.
- Joins between board ends must be made over battens only, using a 35degree mitre, and application of sealant at the join eg: Sikaflex 11FC.
- For cavity systems use perforated cavity base closer flashing at base board to allow drainage, air flow and keep out vermin.
- Cladding must finish 100mm above paved surface or 175mm above un-paved surfaces.
- Use Abodo finishing mouldings backed by hemmed corrosion resistant internal flashings as required, corners, windows, doors and where cladding meets soffit. Fix mouldings with 40mm stainless flat head ring shank nail (hand driven) at max 450mm centres.
- At least one coat of Protector oil or proprietary specified wood stain must be applied to all sides and ends prior to installation and then a further one or two coats applied once boards are fixed in place according to manufacturer's instructions.

Fixing details:


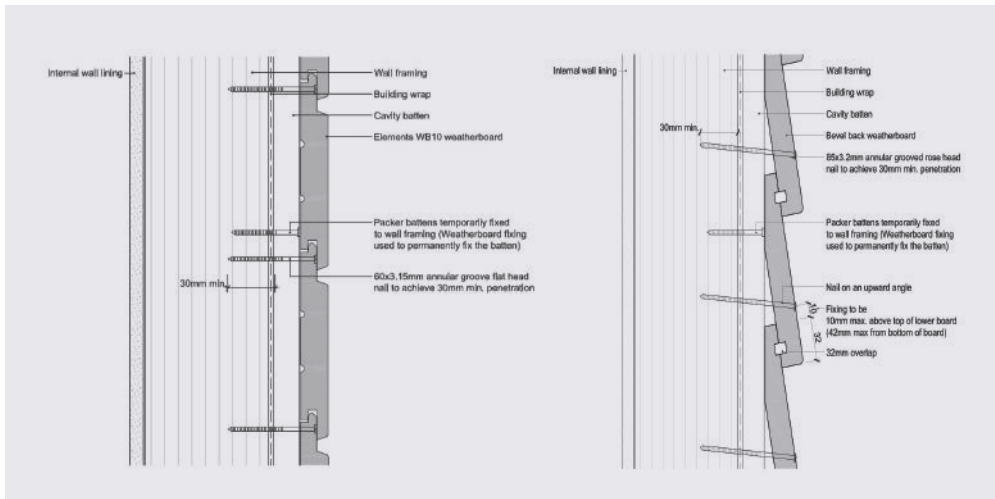


Fig 1 – WB10 Secret Fix

Fig 2 – Bevel Back Face Fix

Note: The adjacent is an overview only.
Please refer to CodeMark Weatherboard Cladding Manual CWB-M-130925 and detail drawings at: abodo.co.nz/resources for detailed installation information prior to specification or commencement of construction.


Exterior mouldings:

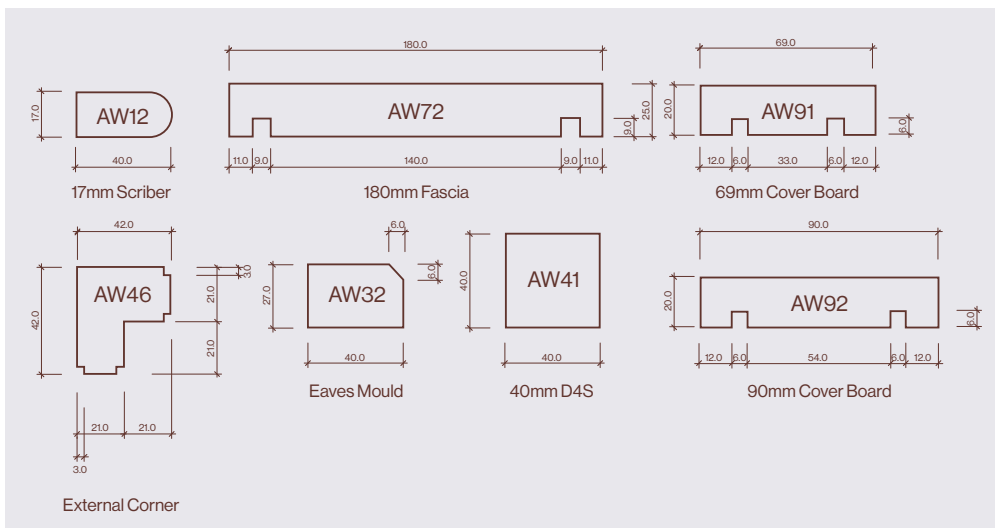

Note: Other profiles are available and should be specified according to the system being used- please refer to Abodo Cladding Architectural Profile Chart and CodeMark Weatherboard Cladding Manual CWB-M-130925 for more details.

Vulcan Cladding


Horizontal castellated cavity battens:

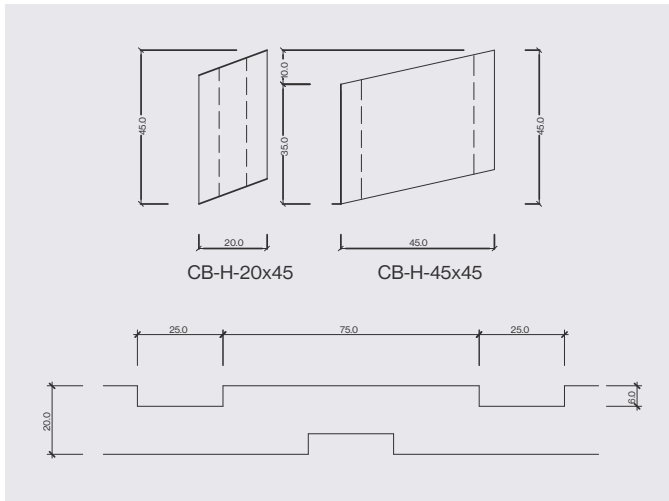


Maintenance

- Wash down every 12 months with gentle detergent such as Sioo:x Maintenance wash, warm water and soft brush.
- If possible it is recommended to apply a further coat of oil after approx 12 months of weathering.
- Make a maintenance check every two summers. Check all weatherboards, junctions, flashings, mouldings and replace or remediate as required to maintain weather tightness of the cladding system.
- Re-coat every 2-3 years or as required to maintain colour and integrity of coating. Re-coat period may be longer or shorter depending on climatic conditions and/or positioning of cladding to the sun. Preparation with Rejuvenator or other similar oxalic timber cleaner is recommended prior to coating.
- For heavily soiled or mouldy areas use Rejuvenator or similar timber cleaner, apply active mouldicide and recoat with penetrating oil.


Abodo flashings



Abodo WB10
Horizontal Base
Cavity Closer
S/Steel 3m



AWF4/ AWF2 Abodo
Unhemmed Corner Flashings
S/Steel 100x100 mm/
120x120mm 3m



AWF3 Abodo Window
Jamb Flashing
S/Steel 3m

Vulcan Cladding

Accessories

Abodo Protector – Water Borne, 4L, 10L:



Abodo Stainless Steel Cladding Screw 4.0 x 45mm:

